



Multi-Tech S2000 Air Purifier

Instruction Manual

(Please read before using air purifier)



Surround Air Division
Indoor Purification Systems, Inc.
334 Marshall Way, Suite C
Layton, Utah 84041

Toll Free: 888.812.1516
PH: 801.444.0606
FX: 801.991.4838

Web: www.surroundair.com
Email: support@surroundair.com





Specifications

- Plug Type US: 120V (120VAC/60HZ)
EU: 230V (230VAC/50HZ)
UK: 240V (240VAC/50HZ)
- Fan Speed High: 180 cubic feet/min.
Medium: 136 cubic feet/min.
Low: 68 cubic feet/min.
- Power: 50W
- HEPA Cleaning Efficiency: 99.9%
- Dimensions: 19 x 16.5 x 10.25 (in)
- Weight: 13 lbs.


Functions

- Washable HEPA (High-Efficiency Particulate Arrestor) Filter to remove airborne particles such as dust and other allergens.
- Washable Pre-Filter to remove larger particles.
- Negative Ion Generator to circulate air-cleaning negative ions throughout the room.
- LCD Display with attractive graphics.
- Air Purifier Timer.
- Three Efficiency Settings: High, Medium, Low.


Instructions

1. Plug in and turn on air purifier.
2. Push  button on panel to turn ON or OFF.
3. Push  button on panel to switch fan speed between High, Medium and Low.
4. Push  button to initiate the timer. Set the time to "0" to run the machine continuously.
5. Push  button to turn the Ion function ON or OFF. This is ON by default. When ON, the Ion and UV graphics will be animated. (UV Lamp optional).

Changing/Cleaning Filters

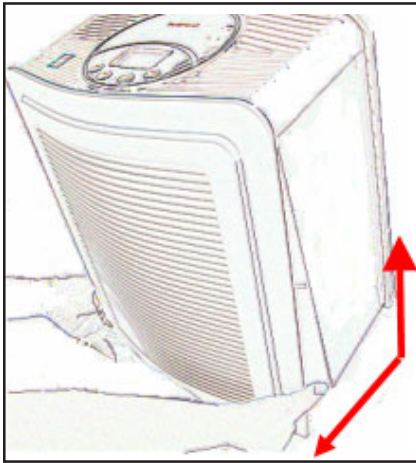

Step 1: Lift up front panel from beneath the front cover, the pull out (Right to Left).

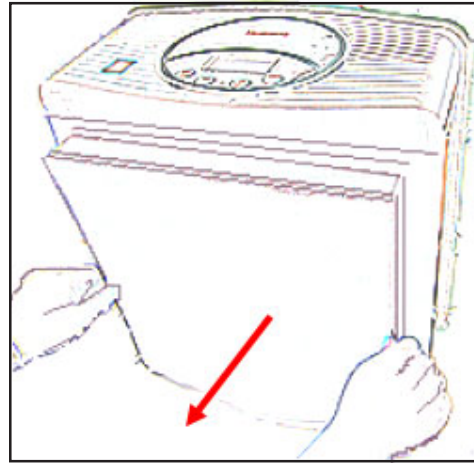

Step 2: Pull the strings attached to either side of the HEPA filter, then pull out.

Step 3: When finished, reinsert the front cover. Place the bottom clips into place first, then make sure you push the front cover tightly back into place.

Washable HEPA Filter: Check the HEPA filter periodically. If it is dark gray in color, then clean it with a brush or vacuum hose until it is light gray or white. You can also clean the black pre-filter attached to the side of the HEPA, facing outward. For optimal performance, change the HEPA filter every two years.

Optional Activated Carbon Filter: Placed after the HEPA. It needs to be replaced every 6 to 12 months.

Optional TiO₂/Photocatalytic Filter: Placed after the HEPA and optional activated carbon filter (if included). Must be included with optional UV lamp. It needs to be replaced about every 12 months.

Optional UV Lamp: Located behind the filters, should be replaced every 12 months.

Troubleshooting

Air Purifier Will Not Turn On

Remove the front cover, then reinstall. Make sure it is pushed firmly into place (especially at the top), to ensure it engages the switch inside. The LCD screen should quickly flash on and off when properly installed.

LCD Screen is Frozen

Remove the front cover, then reinstall.

Caution!

Make sure that air filter cartridge is in place before operating the S2000 air purifier, or direct UV rays may escape through the front cover of the unit. Direct UV light can cause skin or eye damage.

Placement

- * Since the S2000 air purifier uses a fan, and blows a strong current of air out the top of the unit, it is not necessary to place the unit at a high elevation. It can be placed on the floor, on a table, a countertop, or on a shelf.
- * The back of the S2000 should be at least 8 inches away from the wall to prevent discoloration of the wall. Also, there should not be any obstructions above the air outlet on top of the S2000 air purifier. There should be at least 2 feet of space between the top of the air purifier and any object or surface above it.
- * Keep the S2000 at least 3 feet away from computers, televisions, and sensitive electrical equipment, and two feet from occupants in the room while in operation.

Warranty

What is covered: All parts defective in material and workmanship.

Exclusions: Optional replacement parts such as air filter cartridges and UV lamps.

For how long: Three years from purchase date.

What we will do: Repair or replace any defective parts.

What you must do:

1. Contact us for return and shipping instructions. You can call us at (888) 812-1516, or email us at service@surroundair.com.
2. Pack the product in its original carton, and in the same manner in which you received it, or as identical as possible.
3. Include proof of purchase inside box.
4. Label and ship the unit, freight prepaid, to the address provided.

Other Conditions

The provisions of this warranty are in lieu of any other written warranty, whether express or implied, written or oral, including any warranty of merchantability or fitness for a particular purpose. The manufacturer's maximum liability shall not exceed the actual purchase price paid by you for the product. In no event shall the manufacturer be liable for special, incidental, consequential, or indirect damages. This warranty does not cover a defect that resulted from improper or unreasonable use or maintenance, accident, improper packing, or unauthorized tampering, alteration, or modification as determined solely by us. This warranty is void if the label bearing the serial number has been removed or defaced.

90-Day Replacement Policy

If any part requires repair during the first 90 days after receiving your air purifier, due to manufacturer defect, then Surround Air will replace it with a new machine.

What you must do:

1. Contact us for return and shipping instructions. You can call us at (888) 812-1516, or email us at service@surroundair.com.
2. Pack the product in its original carton, and in the same manner in which you received it, or as identical as possible.
3. Include proof of purchase inside box.
4. Label and ship the unit, freight prepaid, to the address provided.

Spare Parts

1. Washable HEPA Filter/Pre-Filter
2. Optional Activated Carbon Filter
3. Optional TiO₂/Photocatalytic Filter
4. Optional UV Lamp

Where to Buy

Surround Air

<http://www.surroundair.com>

Toll Free: 888.812.1516